




Mozilla Firefox setting Test webpage for Windows RD service User Guide

Version No. 1.0


Mozilla Firefox Setting for Test Webpage.

Step 1: Start the ACPL RD service and Open Mozilla Firefox Browser.


Step 2: Click the menu button  as shown Red mark in below image and select  Settings.

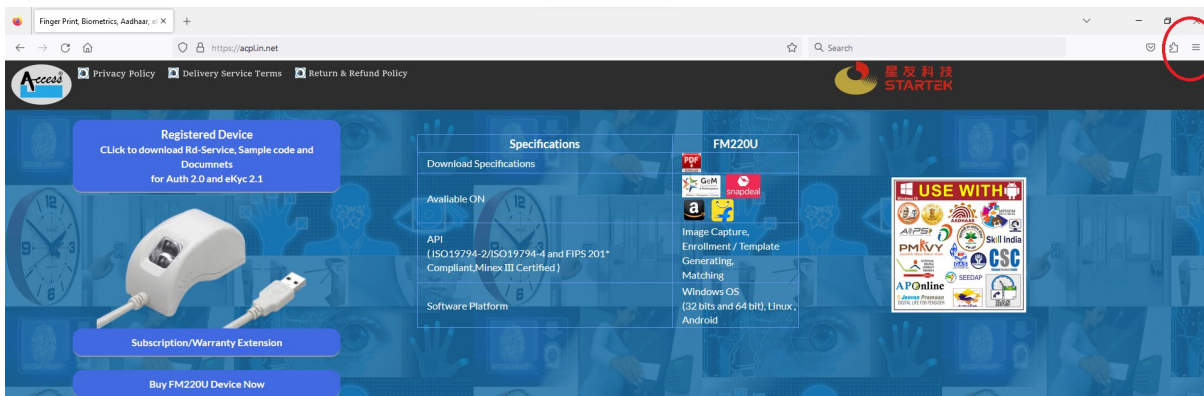


Step 3: Select the Privacy & Security and go to the Certificates section and click on view Certificates buttons.

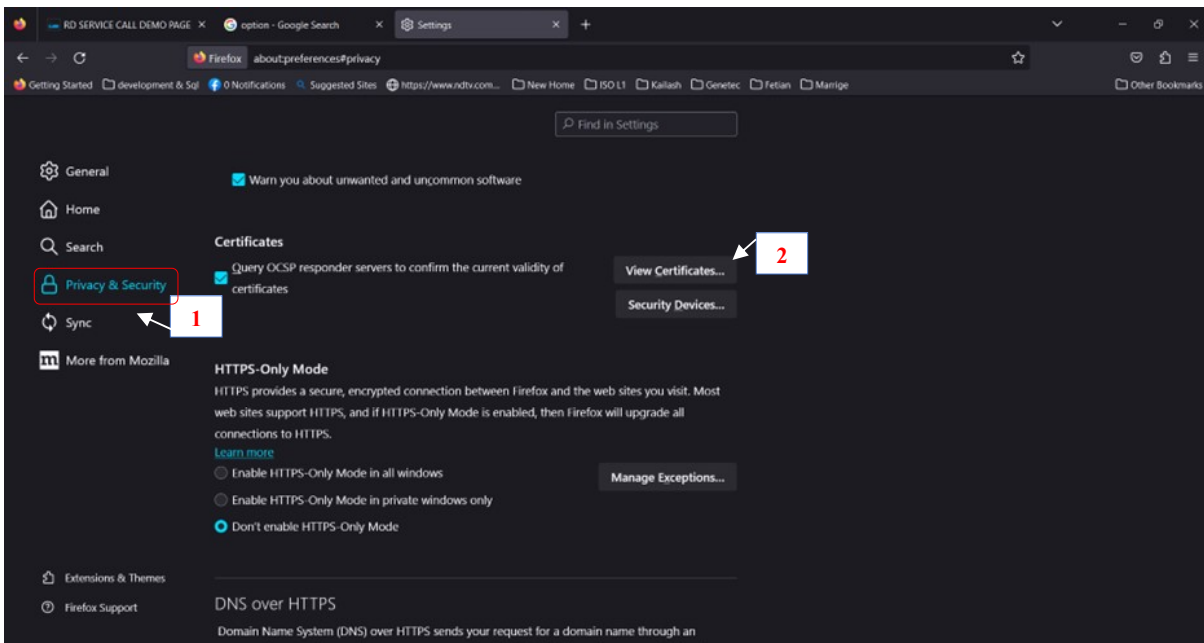


Step 4: The certificate manager window appears, open to the Servers tab. Click On the Add Exception Button to add 11100 ports.

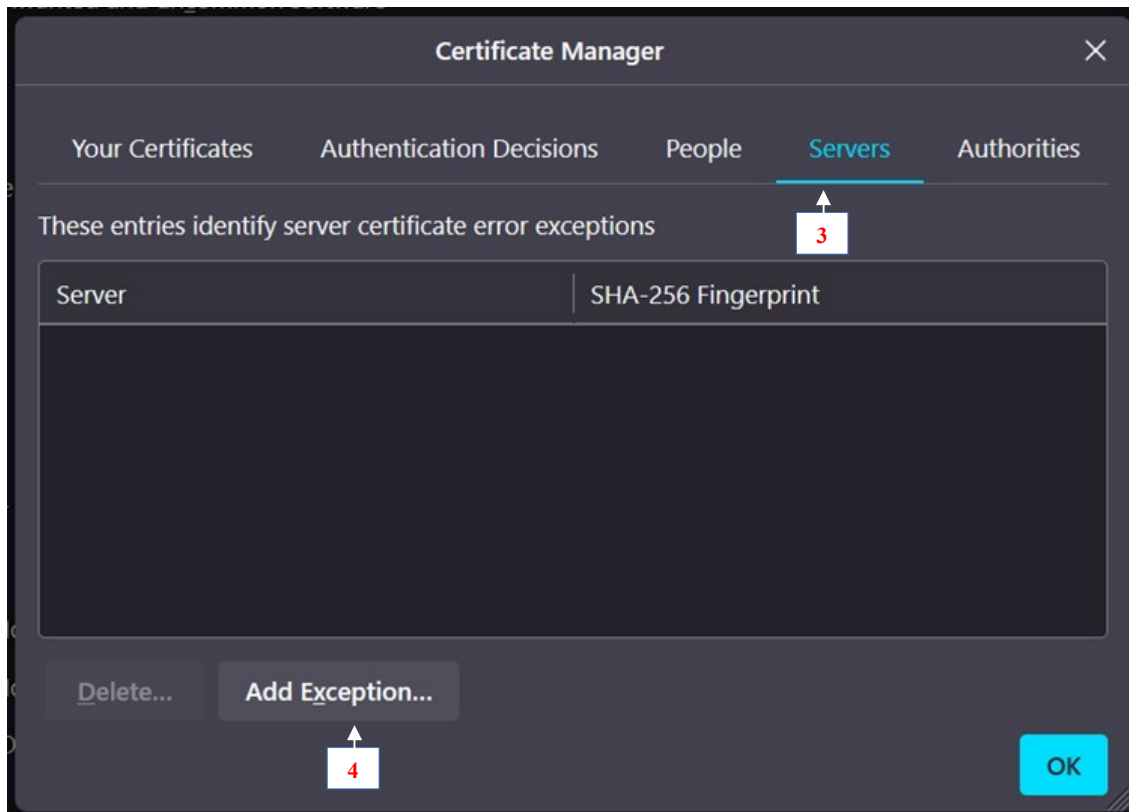


Step 5: Enter `https://localhost:11100` in location and click on the Get certificate.

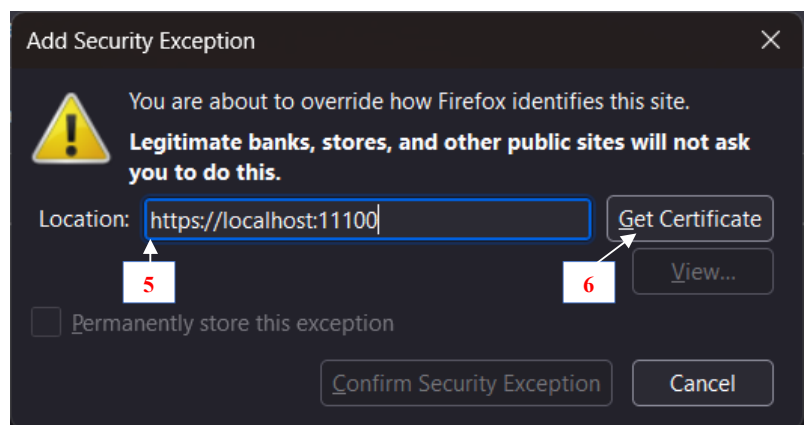


Step 6: Then click on Confirm Security Exception Button.

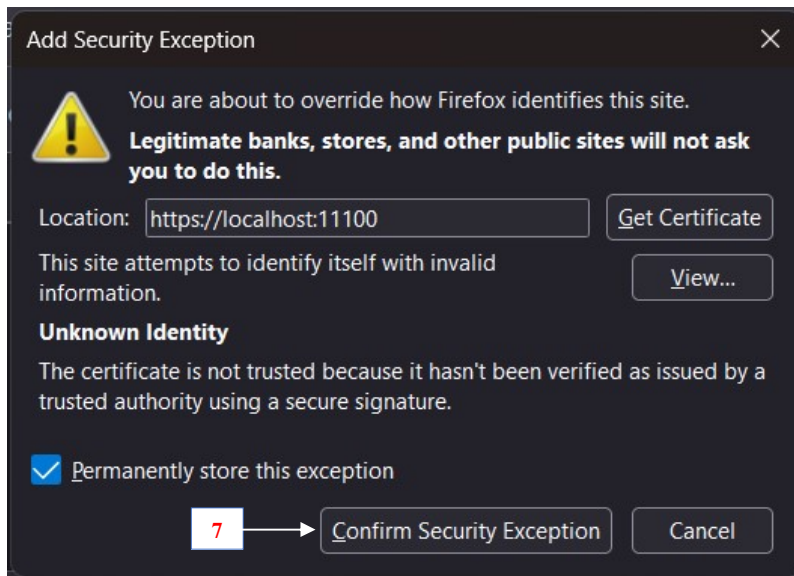

Step 7: Repeat Step 4 to Step 6 to add Exception for port 11200, Each Added server Shows in certificate manager window as shown in below Figure.

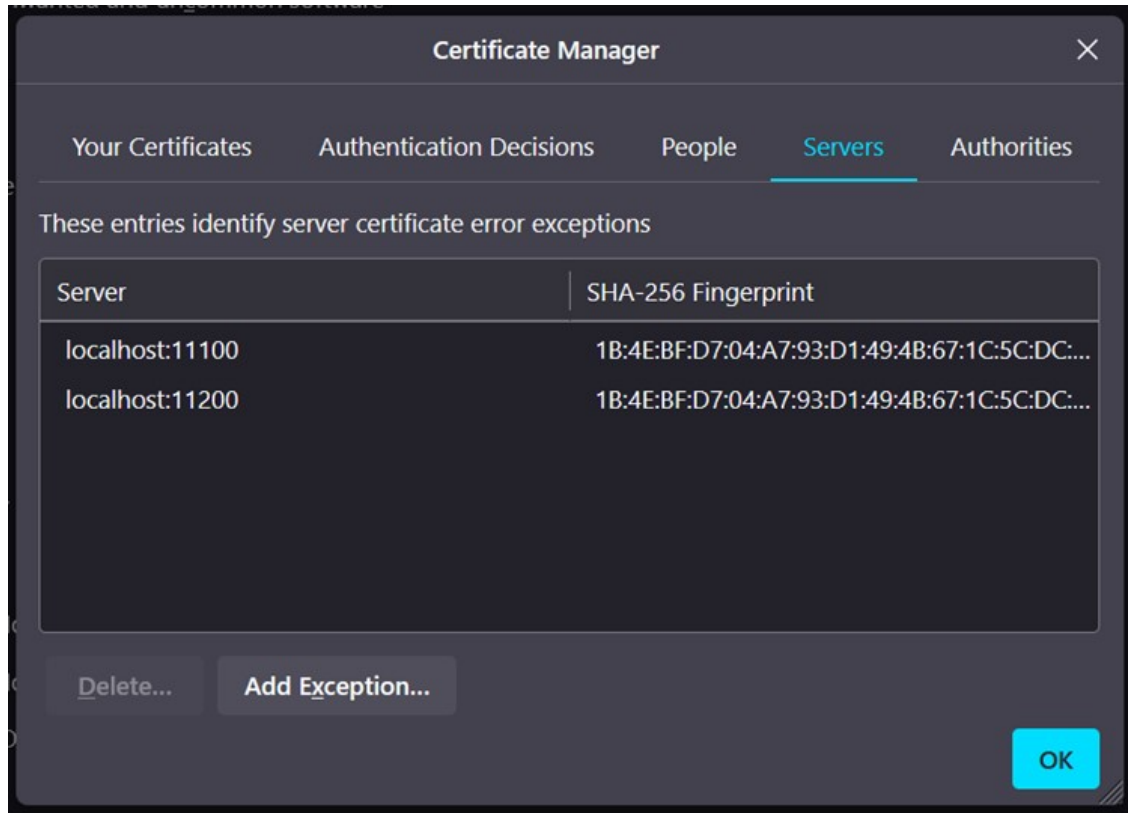

Step 8: Now Open https://www.acpl.in.net/fm220_entry/RD_Service_Call_HTTP.aspx in Mozilla Firefox. As shown in the below image RD service is active in Mozilla Firefox.

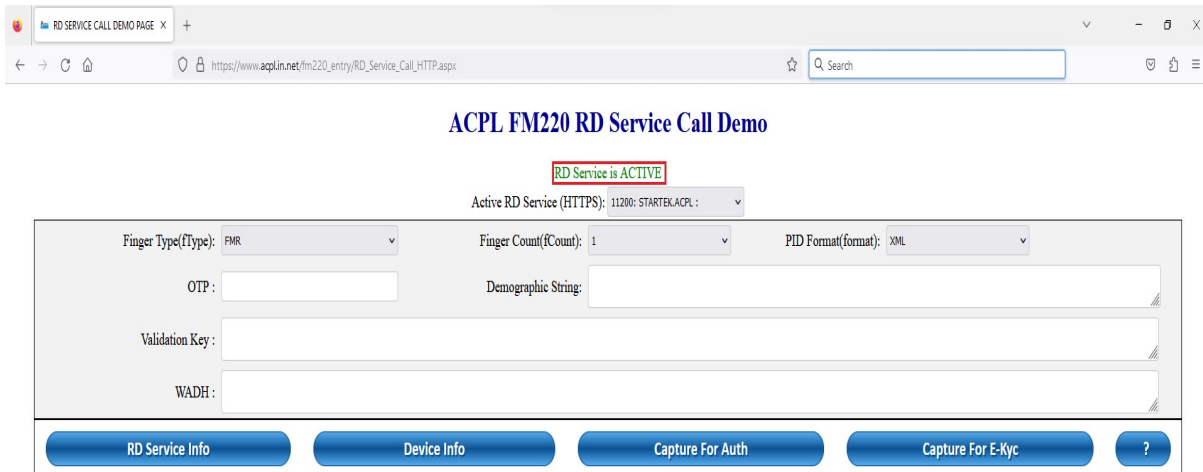

The screenshot shows a web browser window with the URL https://www.acpl.in.net/fm220_entry/RD_Service_Call_HTTP.aspx. The page title is "ACPL FM220 RD Service Call Demo". A red box highlights the text "RD Service is ACTIVE". Below this, there is a dropdown menu for "Active RD Service (HTTPS):" with the value "11200: STARTEKACPL:". The main form contains several fields: "Finger Type(fType):" with a dropdown set to "FMR", "Finger Count(fCount):" with a dropdown set to "1", and "PID Format(format):" with a dropdown set to "XML". There are also input fields for "OTP:", "Demographic String:", "Validation Key:", and "WADH:". At the bottom of the form, there are five buttons: "RD Service Info", "Device Info", "Capture For Auth", "Capture For E-Kyc", and a question mark button.

Please feel free to contact our helpline centre if you find any trouble while operating:

Phone: 0265- 6110 955

WhatsApp & Call:

78740 78565/81419 58565 / 90999 70565.